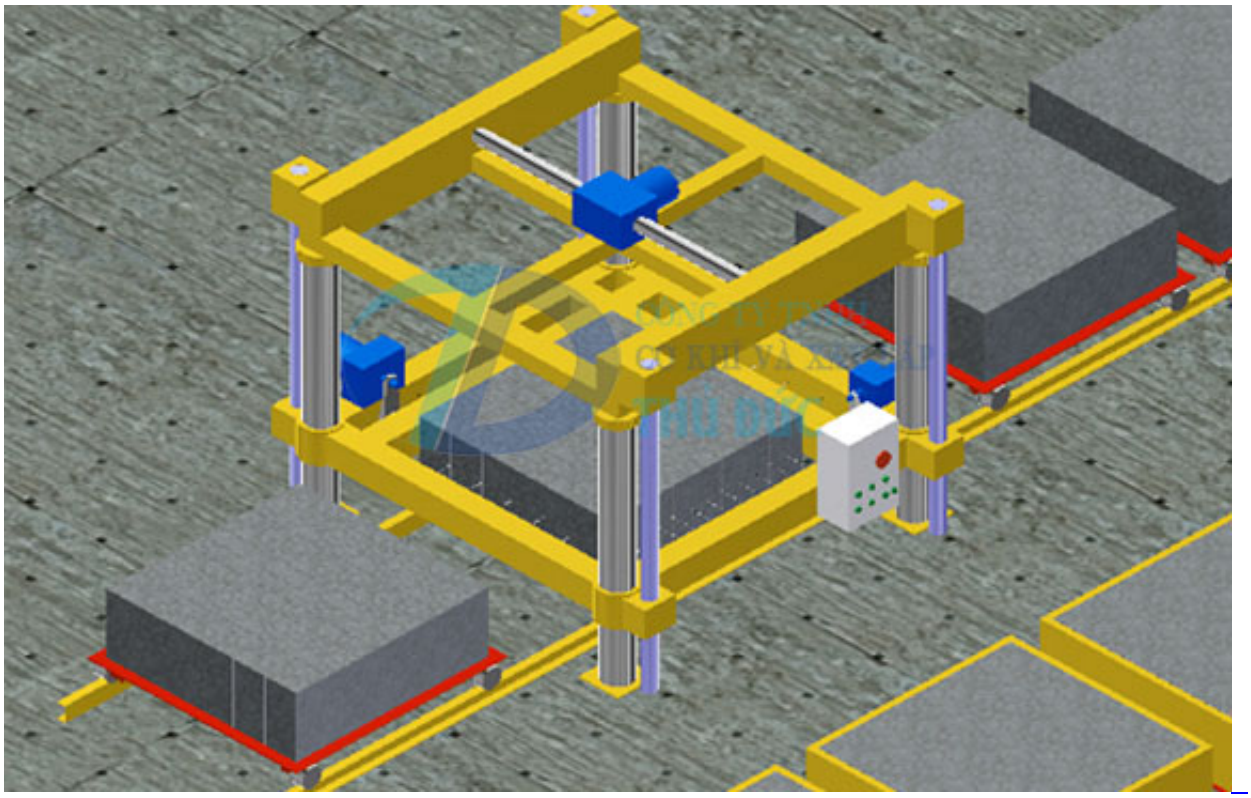


Brick cut machine

Orders

Hotline

Chat zalo

Whatsapp

Facebook

Brick cutters are used to cut light concrete blocks into small, beautiful bricks of uniform size and especially after cutting without oil.
After cutting the car will be transported to the maintenance area 4-8 hours, then the brick is transferred to the wooden pallet, wrapped in plastic film and stored.
On the control panel there is a cut-off frequency control system, which allows adjustment of the cutting surface of the bricks from smooth to rough.

Advantage:

- Product is very uniform and has a very nice surface.
- Cost reduction due to reduced mold oil up to 95% compared to single molded castings.
- The brick does not stick to the oil separator mold so the link between the bricks well, easy to build bowl.
- Reduce a lot of mold removal work.
- Flexible to meet all types of customers.

ITEM	UNIT
Maximum cutting power	8 m^3/h
Brick Dimensions	1050 x 1045 x 400 (600) mm
Tile size	80 x 200 x 400 (600) mm
Quantity - subject to change	72 capsule / cut
Cutting time	5 min / ing
Cutting interval after molding	1h – 8h
Cutting wire made of abrasive steel is available on the market	
Taiwan Electric Motor Reducer	2 x 0.75 kW + 2.2 kW
Electric control device	LS - Korea
	Omron – Japan

Automatic cutting mode

Related Products



Lightweight concrete mixer



Foam Edama - Germany



Lightweight concrete mortar pump



Foaming machine



Cigarettes



Provide lightweight concrete